

HOLLAND

**Douchescharnieren en
klemmen**

Shower hinges and clamps



**DOUCHE
CABINE
ACCESSOIRES**

**SHOWER
BOXES
ACCESSORIES**


GLAS TECH
Solutions bv

ACCESSOIRES VOOR HARDGLAS



GX990.1

Scharnier (glas - wand 90°)
Hinge (glass to wall 90°)

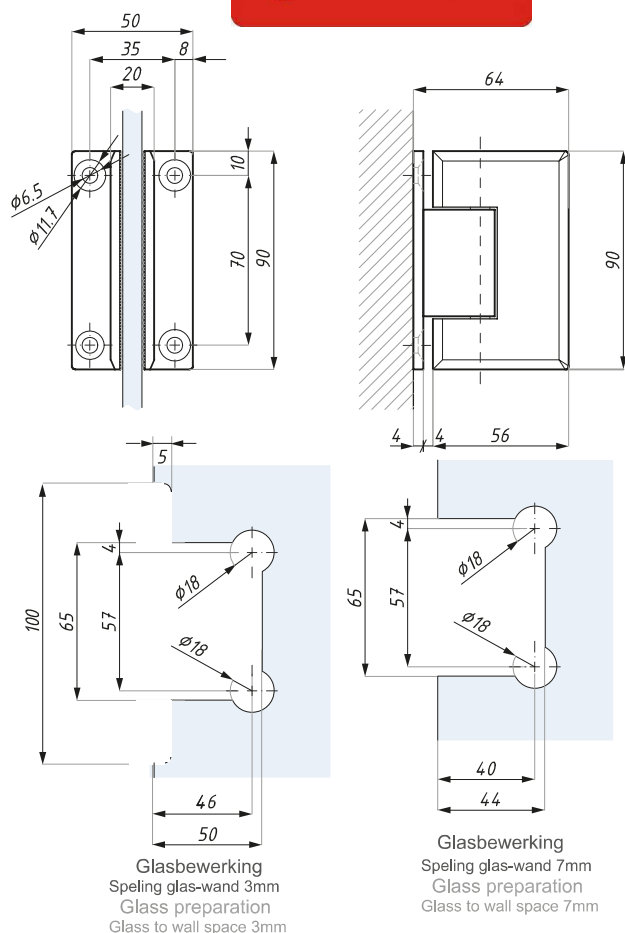
Code

GX990.1PC

GX990.1SC

materiaal: messing

glasdikte (mm): 8; 10

max. deurgewicht per paar (kg): 60

max. deurbreedte (mm): 900

aanbevolen moment schroeven (Nm): 10

Finish / Finish

chrom gepolijst / polish chrome

look rvs / satin chrome

material: brass

glass thickness (mm): 8; 10


max. door weight per pair (kg): 60

max. door width (mm): 900

recommended torque force (Nm): 10

GX990.1OS

Scharnier: zij bevestiging (glas - wand 90°)
Hinge: side fixing (glass to wall 90°)

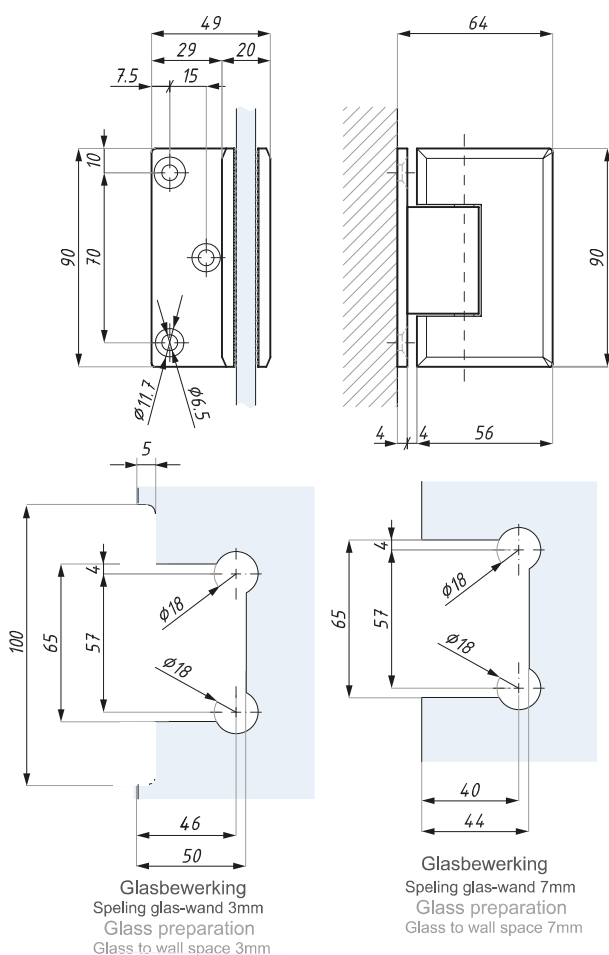
Code

GX990.1OSPC

GX990.1OSSC

materiaal: messing

glasdikte (mm): 8; 10

max. deurgewicht per paar (kg): 60

max. deurbreedte (mm): 900

aanbevolen moment schroeven (Nm): 10

Finish / Finish

chrom gepolijst / polish chrome

look rvs / satin chrome

material: brass

glass thickness (mm): 8; 10

max. door weight per pair (kg): 60

max. door width (mm): 900

recommended torque force (Nm): 10

GX990.2

Scharnier (glas - glas 180°)
Hinge (glass to glass 180°)



Code	Finish / Finish
GX990.2PC	chrom gepolijst / polish chrome
GX990.2SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8; 10
max. deurgewicht per paar (kg): 60	max. door weight per pair (kg): 60
max. deurbreedte (mm): 900	max. door width (mm): 900
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

GX990.3



Scharnier (glas - glas 135°)
Hinge (glass to glass 135°)






Code	Finish / Finish
GX990.3PC	chrom gepolijst / polish chrome
GX990.3SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8; 10
max. deurgewicht per paar (kg): 60	max. door weight per pair (kg): 60
max. deurbreedte (mm): 900	max. door width (mm): 900
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

GLAS TECH
Solutions b.v.

Quality product of P & M

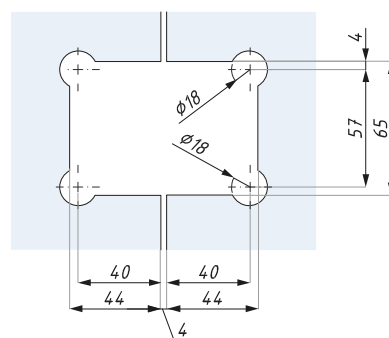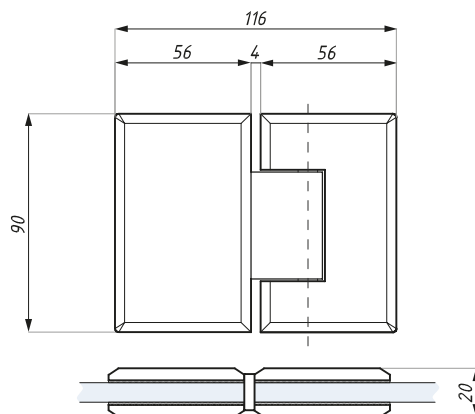


Glasbewerking
Glass preparation

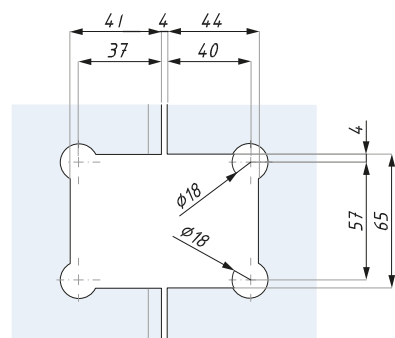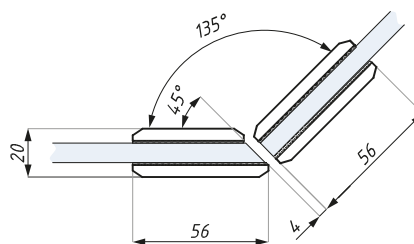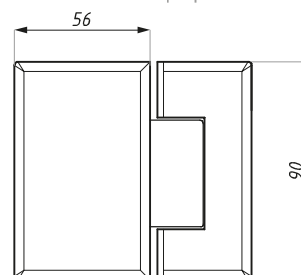

Glaskant 45°
Mitred edge 45°

Glasbewerking
Glass preparation

Scharnier (glas - glas 90°)
Hinge (glass to glass 90°)

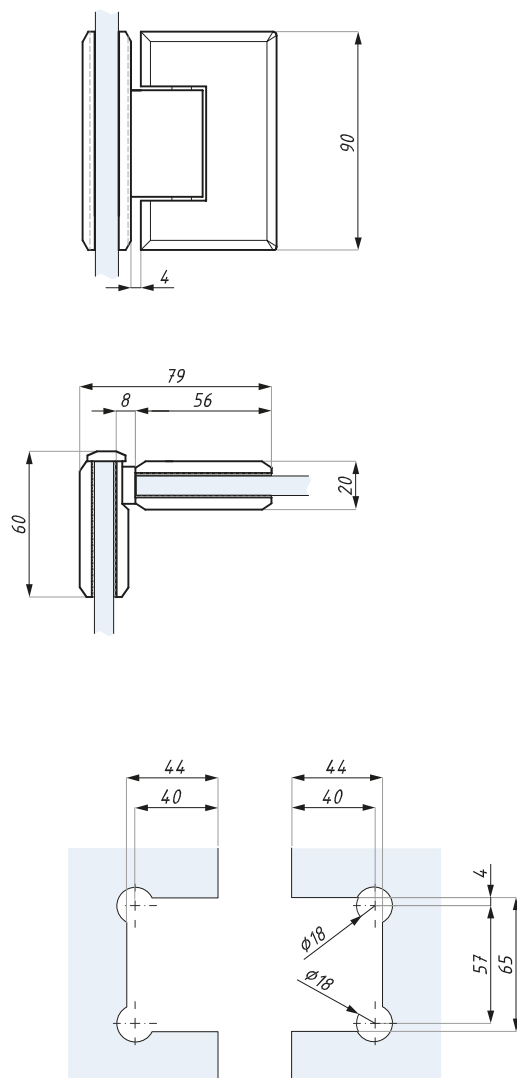

Glasbewerking
Glass preparation





Code	Finish / Finish
GX990.4PC	chrom gepolijst / polish chrome
GX990.4SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8; 10
max. deurgewicht per paar (kg): 60	max. door weight per pair (kg): 60
max. deurbreedte (mm): 900	max. door width (mm): 900
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

PC401



Klem (glas-wand)
Clamp (glass to wall)

GLAS TECH
Solutions bv.

Quality product of **P.M.**

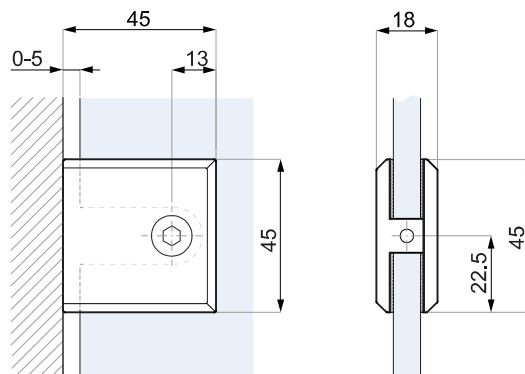

U-Inkeping stelbaarheid 0-5mm
U-notch glass adjustment 0-5 mm

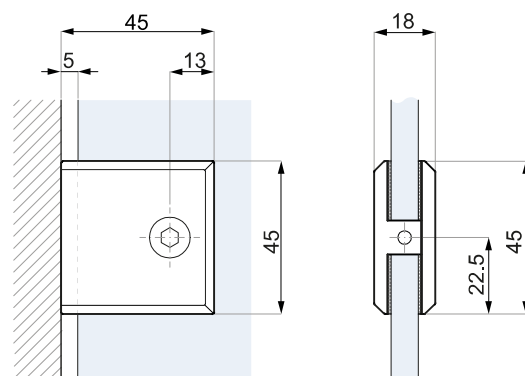



Standaard glasboring 8 mm
Standard notch for glass 8 mm

Code	Finish / Finish
PC401PC	chrom gepolijst / polish chrome
PC401SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8;10
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

GLAS TECH
Solutions b.v.

PC401L

Klem (glas - wand 90°)
 Clamp (glass to wall 90°)

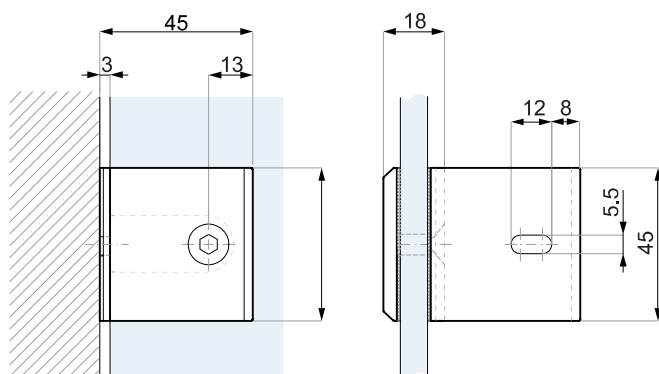

Glasboring
 Glass preparation

Code

PC401LPC

PC401LSC

materiaal: messing

glasdikte (mm): 8; 10

aanbevolen moment schroeven (Nm): 10

Finish / Finish

chrom gepolijst / polish chrome

look rvs / satin chrome




material: brass

glass thickness (mm): 8; 10

recommended torque force (Nm): 10

PC402

Klem (glas - glas 180°)
 Clamp (glass to wall 90°)

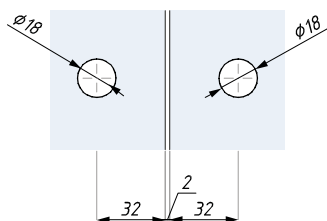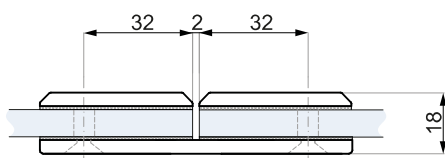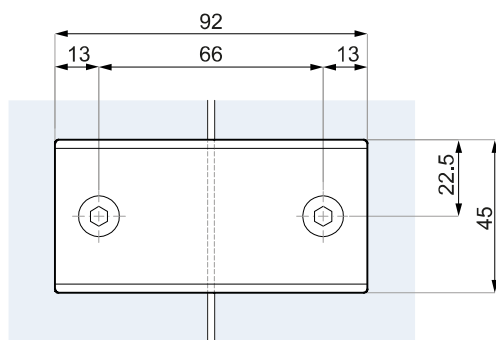

Glasboring
 Glass preparation



Code

PC402PC

PC402SC

materiaal: messing

glasdikte (mm): 8; 10

aanbevolen moment schroeven (Nm): 10

Finish / Finish

chrom gepolijst / polish chrome

look rvs / satin chrome

material: brass

glass thickness (mm): 8; 10

recommended torque force (Nm): 10

PC403

Klem (glas - glas 135°)
Clamp (glass to glass 135°)



Code	Finish / Finish
PC403PC	chrom gepolijst / polish chrome
PC403SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte: 8; 10	glass thickness: 8; 10
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

PC406




Klem (glas - wand)
Clamp (glass to wall)





Code	Finish / Finish
PC406PC	chrom gepolijst / polish chrome
PC406SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8; 10
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10

GLAS TECH
Solutions bv.




Quality product of **P.M.**

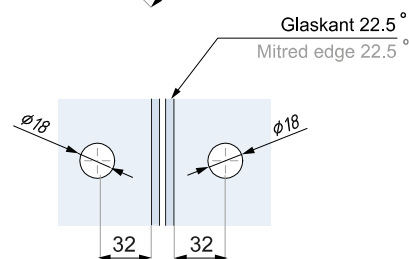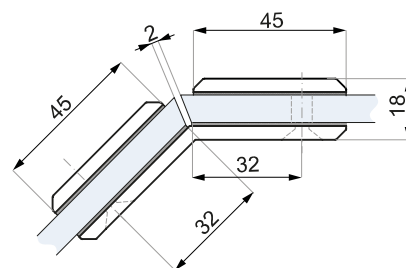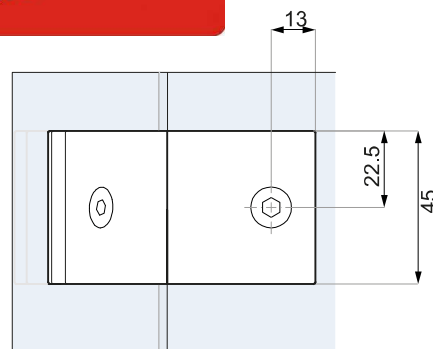

Glasbewerking
Glass preparation

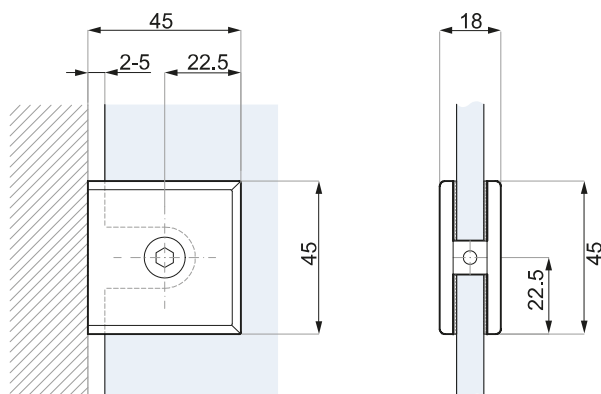

Glasbewerking
Glass preparation

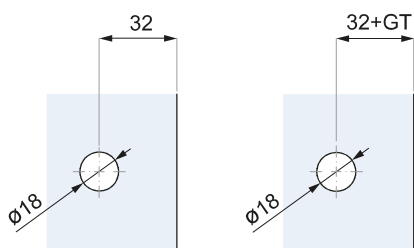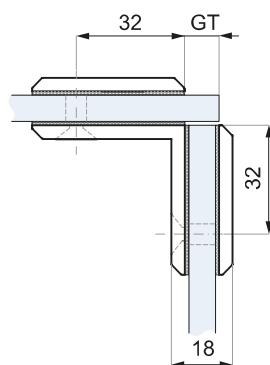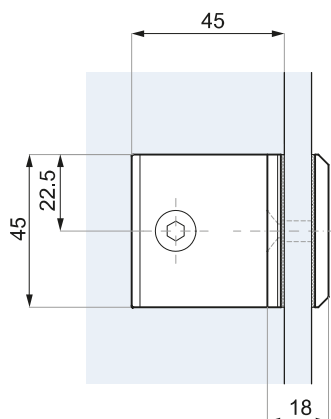

Glasbewerking
Glass preparation

GT-glasdikte + dikte pakking
glass thickness + gasket thickness



Code	Finish / Finish
PC414PC	chrom gepolijst / polish chrome
PC414SC	look rvs / satin chrome
materiaal: messing	material: brass
glasdikte (mm): 8; 10	glass thickness (mm): 8; 10
aanbevolen moment schroeven (Nm): 10	recommended torque force (Nm): 10



www.glastech.eu



GLASS HARDWARE Be Ne De Lux

Burgemeester van Meeuwenstraat 2
6191 ND Beek (LB)
The Netherlands

Tel: +31(0) 46 428 07 28
sales@glastech.eu

www.glastech.eu