


BUDRIO

Douchestrippen
Clip seals

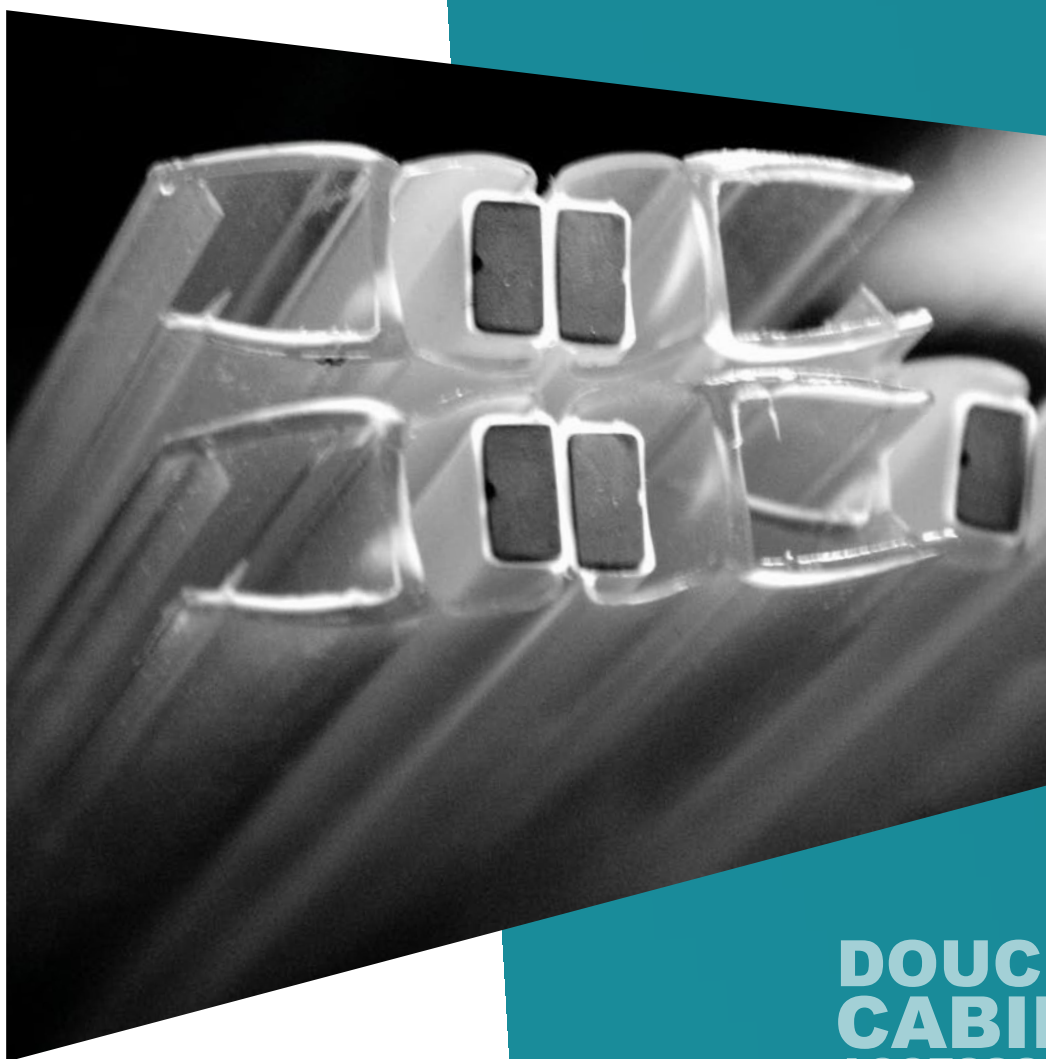


**DOUCHE
CABINE
ACCESSOIRES**

**SHOWER
BOXES
ACCESSORIES**


GLAS TECH
Solutions bv

ACCESSOIRES VOOR HARDGLAS







Douchestrip ABE6-8 voor 6 mm glas
Clip seal ABE6-8 for glass 6 mm




Douchestrip ABE6-8 voor 8 mm glas
Clip seal ABE6-8 for glass 8 mm



Douchestrip ABE6-8
Clip seal ABE6-8

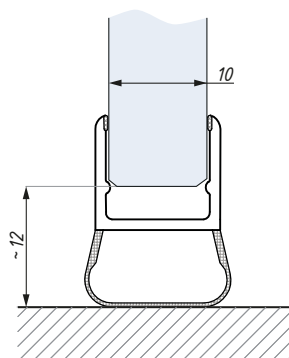

Douchestrip ABE10 voor 10 mm glas
Clip seal ABE10 for glass 10 mm



Douchestrip ABE10
Clip seal ABE10


Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
ABE6-8	6-8	2500
ABE10	10	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2

ASE


Douchestrip
Clip seal

GLAS TECH


Solutions bv.

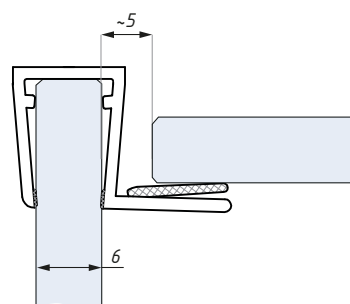

Douchestrip ASE6-8 voor 6 mm glas
Clip seal ASE6-8 for glass 6 mm

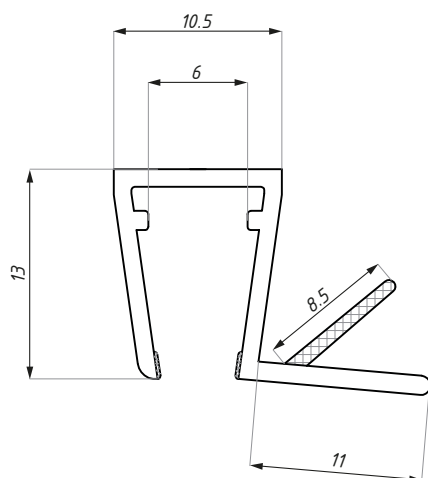


Douchestrip ABE6-8
Clip seal ABE6-8




Douchestrip ASE8 voor 8 mm glas
Clip seal ASE8 for glass 8 mm


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
ASE6-8	6-8	2500
materiaal: PVC		
material: PVC		
temperatuur range: 0 - 50°C		
temperature range: 0 - 50°C		
UV resistent: EN ISO 4892-2		
UV resistance: EN ISO 4892-2		

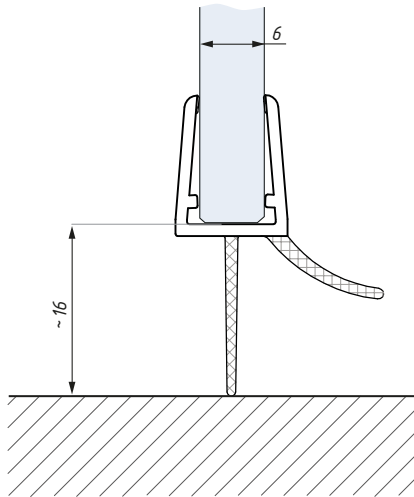

Douchestrip BSE6-8 voor 6 mm glas
Clip seal BSE6-8 for glass 6 mm

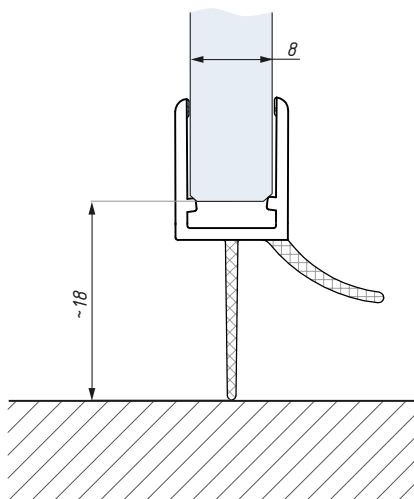

Douchestrip BSE6-8 voor 8 mm glas
Clip seal BSE6-8 for glass 8 mm

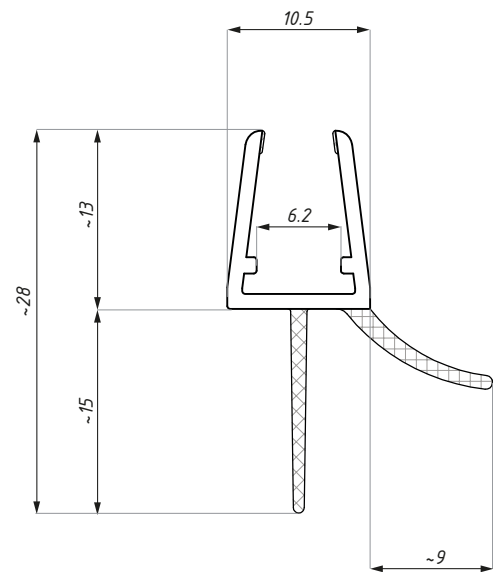

Douchestrip BSE6-8
Clip seal BSE6-8


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
BSE6-8	6-8	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2

DOE


Douchestrip
Clip seal

GLAS TECH


Solutions bv.

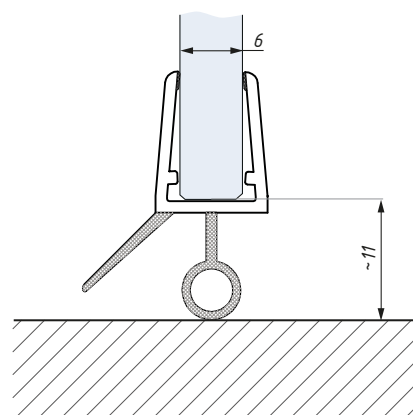

Douchestrip DOE6-8 voor 6 mm glas
Clip seal DOE6-8 for glass 6 mm

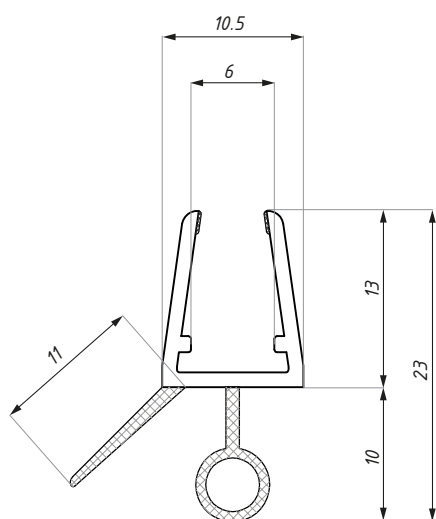


Douchestrip DOE6-8
Clip seal DOE6-8

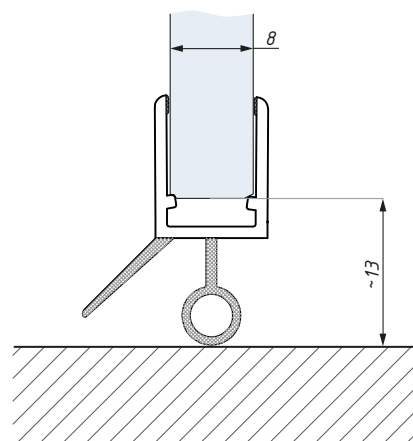


Douchestrip DOE6-8 voor 8 mm glas
Clip seal DOE6-8 for glass 8 mm


Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
ASE6	8-12	2500
materiaal: PVC		
material: PVC		
temperatuur range: 0 - 50°C		
temperature range: 0 - 50°C		
UV resistent: EN ISO 4892-2		
UV resistance: EN ISO 4892-2		

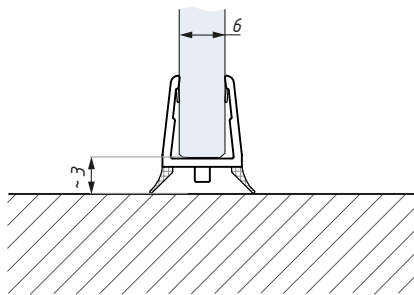

Douchestrip GCE6-8 voor 6 mm glas
Clip seal GCE6-8 for glass 6 mm

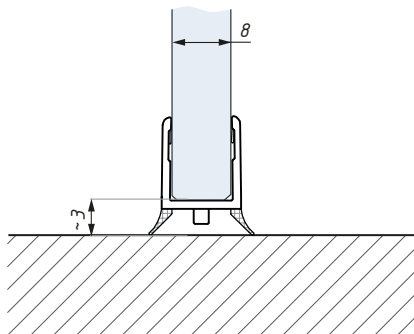


Douchestrip GCE6-8 voor 8 mm glas
Clip seal GCE6-8 for glass 8 mm

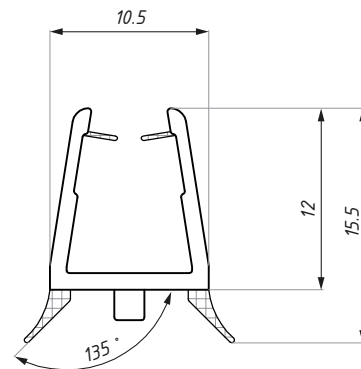


Douchestrip GCE6-8
Clip seal GCE6-8


Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
GCE6-8	6-8	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2

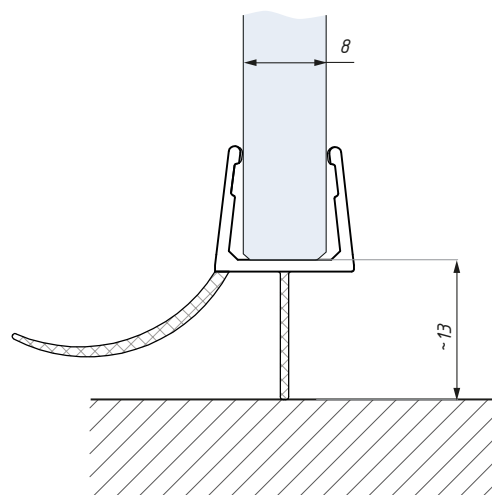

Douchestrip GGE8-10 voor 8 mm glas
Clip seal GGE8-10 for glass 8 mm

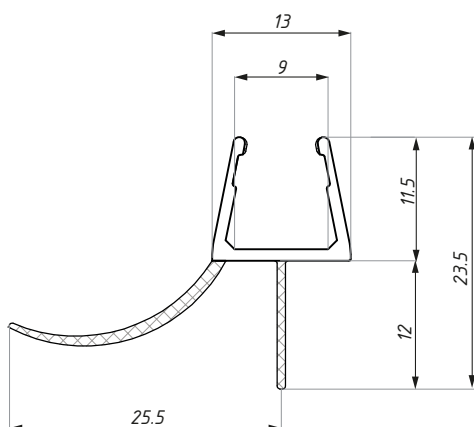


Douchestrip GGE8-10
Clip seal GGE8-10 f

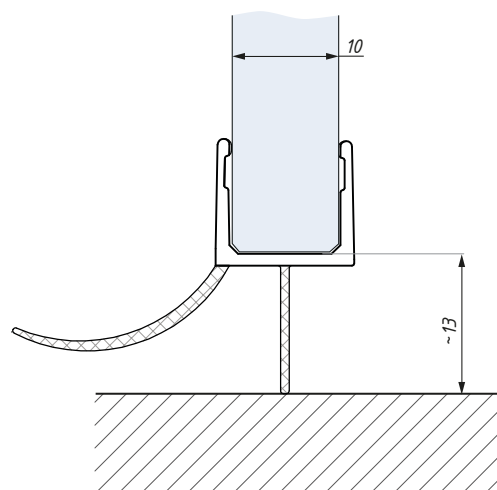


Douchestrip GGE8-10 voor 10 mm glas
Clip seal GGE8-10 for glass 10 mm


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
GGE8-10	8-10	2500
materiaal: PVC		
material: PVC		
temperatuur range: 0 - 50°C		
temperature range: 0 - 50°C		
UV resistent: EN ISO 4892-2		
UV resistance: EN ISO 4892-2		

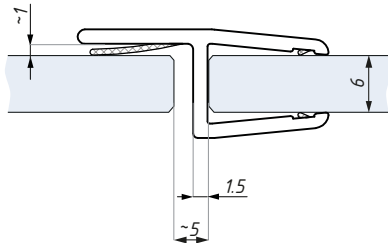


Douchestrip OWE6-8 voor 6 mm glas
Clip seal OWE6-8 for glass 6 mm

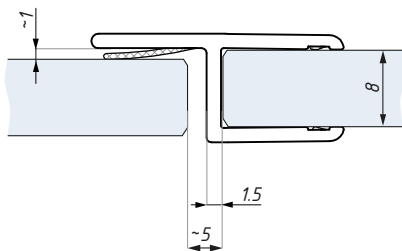


Douchestrip OWE6-8 voor 8 mm glas
Clip seal OWE6-8 for glass 8 mm

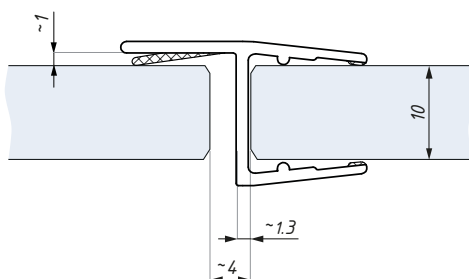

Douchestrip OWE10 voor 10 mm glas
Clip seal OWE10 for glass 10 mm

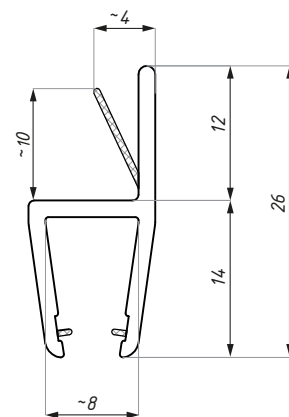

Douchestrip OWE6-8
Clip seal OWE6-8

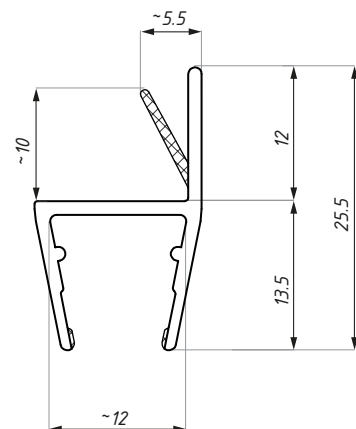

Douchestrip OWE10
Clip seal OWE10


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
OWE6-8	6-8	2500
OWE10	10	2500
materiaal: PVC		
temperatuur range: 0 - 50°C		
UV resistent: EN ISO 4892-2		

SDE


Douchestrip
Clip seal

GLAS TECH


Solutions b.v.

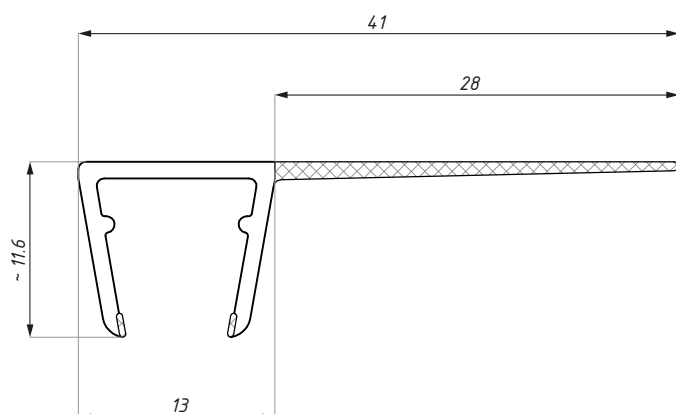

Douchestrip GGE8-10
Clip seal GGE8-10 f

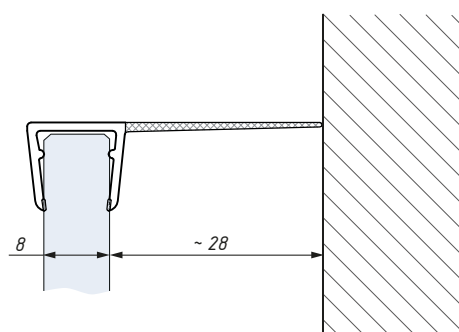


Douchestrip SDE8-10 voor 8 mm glas
Clip seal SDE8-10 for glass 8 mm

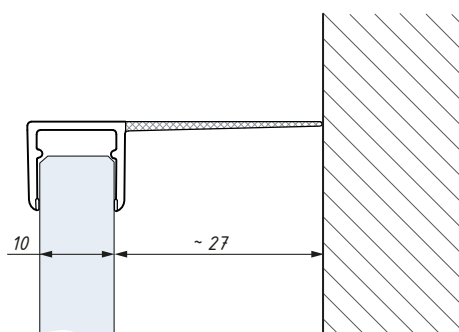


Douchestrip SDE8-10 voor 10 mm glas
Clip seal SDE8-10 for glass 10 mm


Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
SDE8-10	8-10	2500
materiaal: PVC		
material: PVC		
temperatuur range: 0 - 50°C		
temperature range: 0 - 50°C		
UV resistant: EN ISO 4892-2		
UV resistance: EN ISO 4892-2		

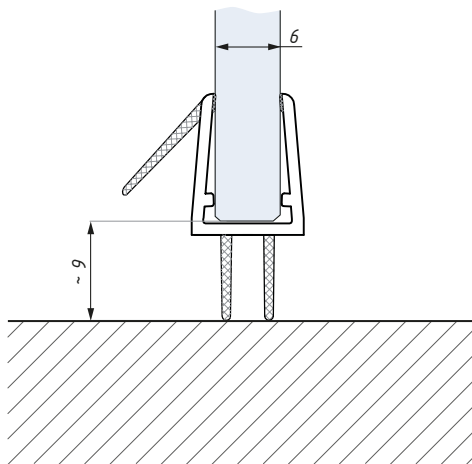

Douchestrip WBE6-8 voor 6 mm glas
Clip seal WBE6-8 for glass 6 mm

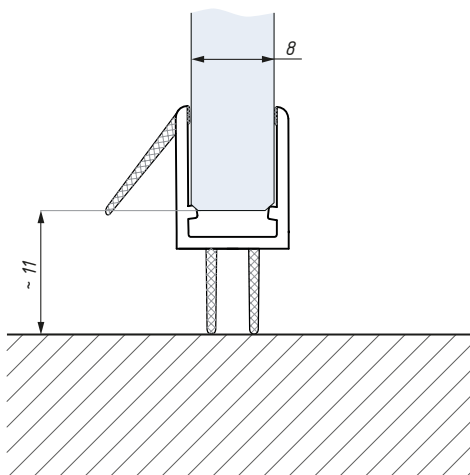


Douchestrip WBE6-8 voor 6 mm glas
Clip seal WBE6-8 for glass 6 mm

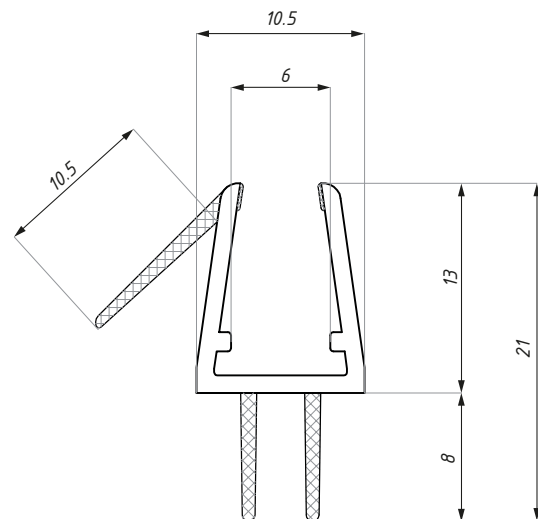


Douchestrip WBE6-8
Clip seal WBE6-8


Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
WBE6-8	6-8	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2




Douchestrip WSE6-8
Clip seal WSE6-8

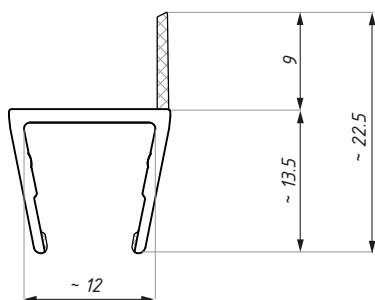


Douchestrip WSE8-10
Clip seal WSE8-10

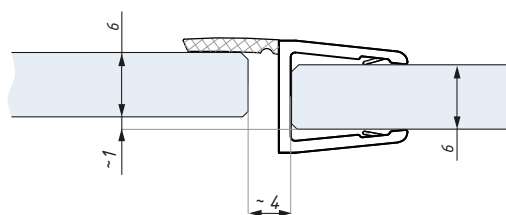

Douchestrip WSE6-8 voor 6 mm glas
Clip seal WSE6-8 for glass 6 mm

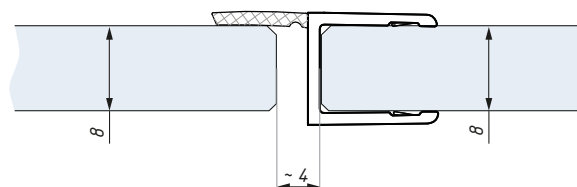

Douchestrip WSE6-8 voor 8 mm glas
Clip seal WSE6-8 for glass 8 mm

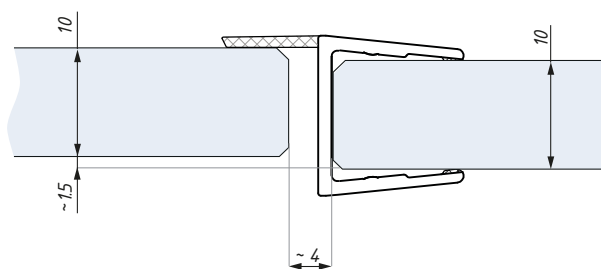


Douchestrip WSE8-10 voor 10 mm glas
Clip seal WSE8-10 for glass 10 mm


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
WSE6-8	6-8	2500
WSE8-10	8-10	2500

materiaal: PVC	material: PVC
temperatuur range: 0 - 50°C	temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2	UV resistance: EN ISO 4892-2


Magnetische douchestrip
Magnetic clip seal

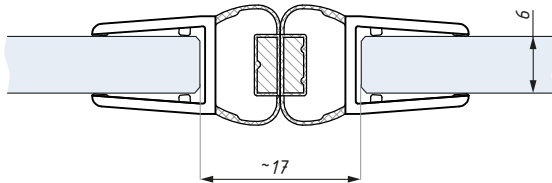

Douchestrip PMBE6-8 voor 6 mm glas
Clip seal PMBE6-8 for glass 6 mm

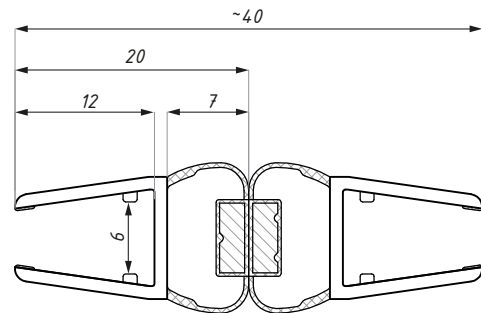

Douchestrip PMBE6-8
Clip seal PMBE6-8

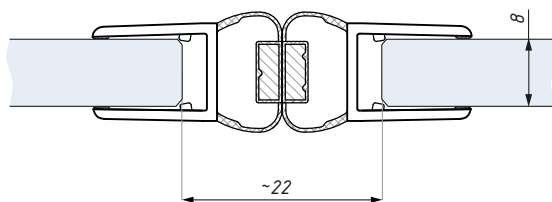

Douchestrip PMBE6-8 voor 8 mm glas
Clip seal PMBE6-8 for glass 8 mm



Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
PMBE6-8	6-8	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2

PMFE


Magnetische douchestrip
Magnetic clip seal

GLAS TECH



Solutions bv.

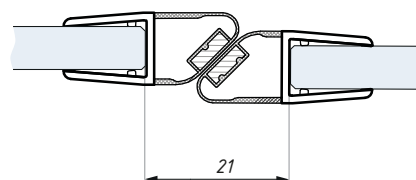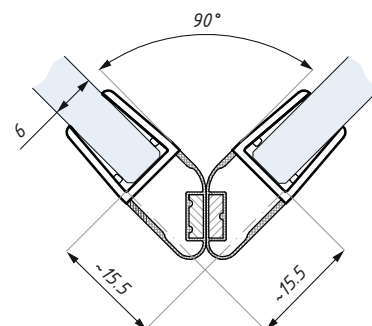

Douchestrip PMFE6-8 voor 6 mm glas
Clip seal PMFE6-8 for glass 6 mm

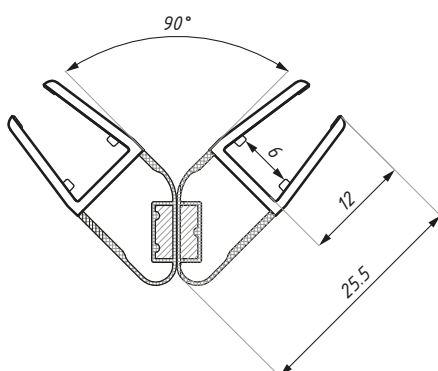


Douchestrip PMFE6-8
Clip seal PMFE6-8

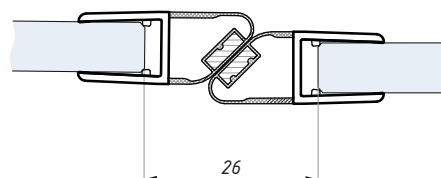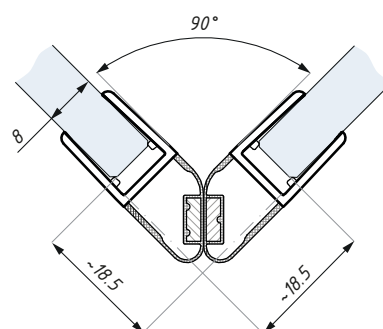


Douchestrip PMFE6-8 voor 8 mm glas
Clip seal PMFE6-8 for glass 8 mm


Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
PMFE6-8	6-8	2500
materiaal: PVC	material: PVC	
temperatuur range: 0 - 50°C	temperature range: 0 - 50°C	
UV resistent: EN ISO 4892-2	UV resistance: EN ISO 4892-2	

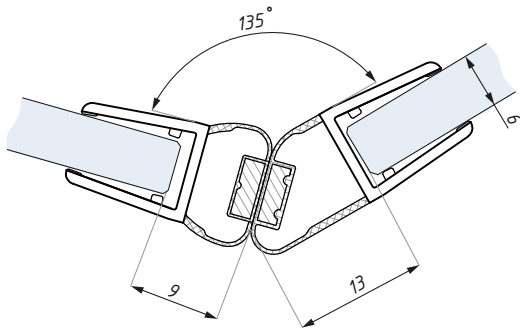

Douchestrip PMSE6-8 voor 6 mm glas
Clip seal PMSE6-8 for glass 6 mm

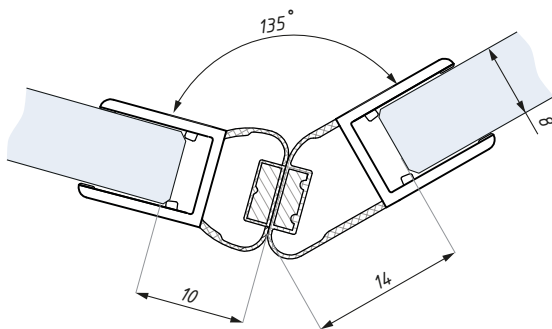

Douchestrip PMSE6-8 voor 8 mm glas
Clip seal PMSE6-8 for glass 8 mm

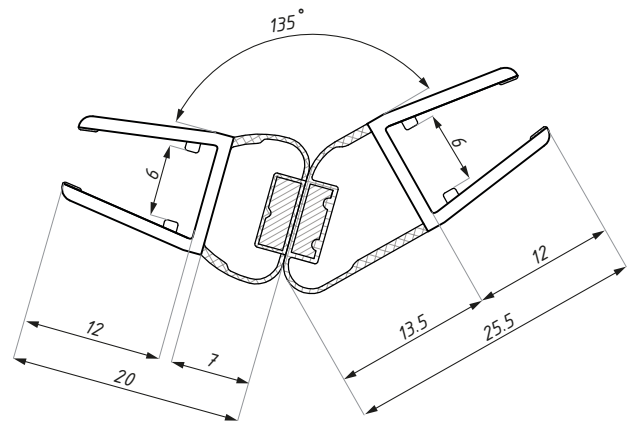

Douchestrip PMSE6-8
Clip seal PMSE6-8



Code	Glasdikte (mm) Glass tickness (mm)	Lengte (mm) Length (mm)
PMSE6-8	6-8	2500
materiaal: PVC		material: PVC
temperatuur range: 0 - 50°C		temperature range: 0 - 50°C
UV resistent: EN ISO 4892-2		UV resistance: EN ISO 4892-2

LMP2200

Magnetisch profiel
Magnetic profile



GLAS TECH
Solutions bv.

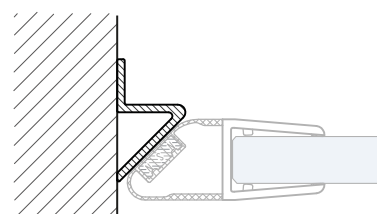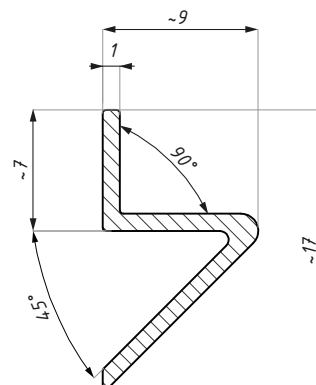



Code	Lengte (mm) Length (mm)
LMP2200	2200

materiaal: RVS


material: Stainless steel

LMP2200

Magnetisch profiel SET
Magnetic profile SET

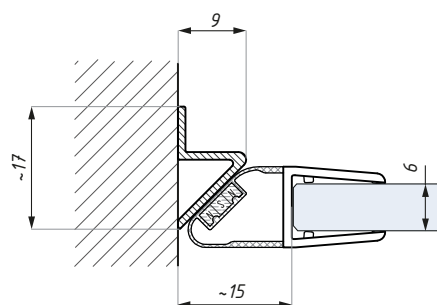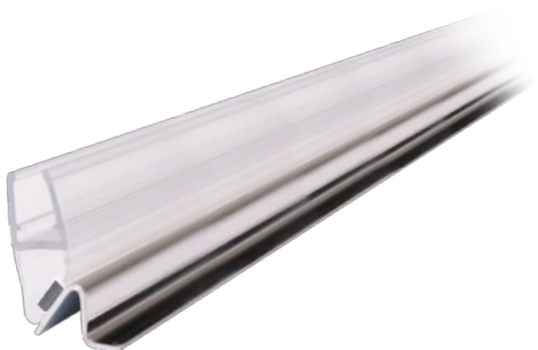

Profiel LMP2200SET voor 6 mm glas
Profile LMP2200SET for glass 6 mm

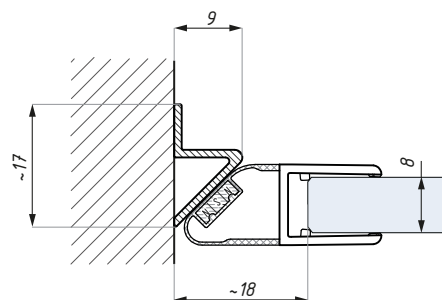

Profiel LMP2200SET voor 8 mm glas
Profile LMP2200SET for glass 6 mm

Code	Glasdikte (mm) Glass thickness (mm)	Lengte (mm) Length (mm)
LMP2200SET	6-8	2200

materiaal: PVC/RVS

material: PVC/Stainless steel

temperatuur range: 0 - 50°C


temperature range: 0 - 50°C

UV resistent: EN ISO 4892-2

UV resistance: EN ISO 4892-2

HPPMMA

Dorpelprofiel
Doordstep seal



Code

HPPMMA

Lengte (mm)

Length (mm)

2000

materiaal: Acryl glas

material: Acrylic glass



www.glastech.eu



GLASS HARDWARE Be Ne De Lux

Burgemeester van Meeuwenstraat 2
6191 ND Beek (LB)
The Netherlands

Tel: +31(0) 46 428 07 28
sales@glastech.eu

www.glastech.eu