

TRAPANI

Balustrade
Frameless balustrade system



BALUSTRADES
BALUSTRADES

GLAS TECH
Solutions bv

ALUMINIUM BALUSTRADE PROFIEL ALUMINIUM CHANNEL SHOE



BAL-D

Channel Shoe
Floor installation





BAL-S

Channel Shoe
Side installation




BAL-F

Channel Shoe
Floor installation with side xing

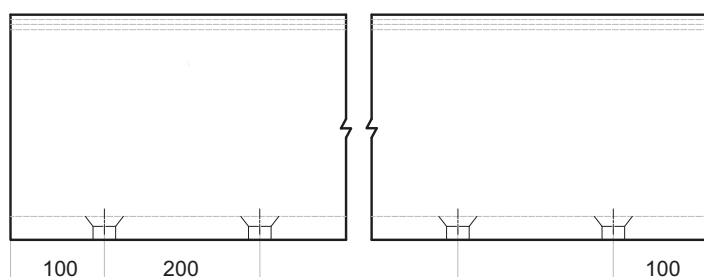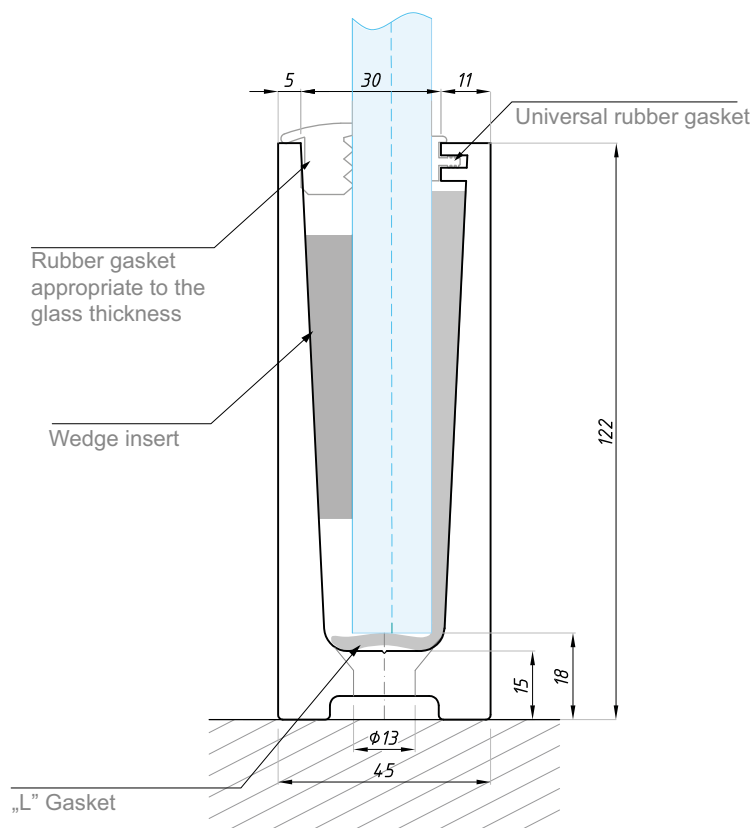

Spacing of the fixing holes - channel shoe 3000 mm


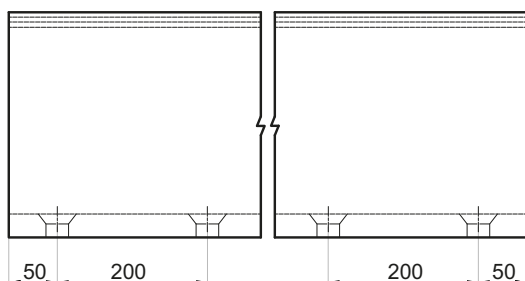


Spacing of the fixing holes - channel shoe 1500 mm

Code	Lenght (mm)	Finish
BAL-D 3000 NAS	3000	satijn geanodiseerd / satin anodized
BAL-D 3000 NA	3000	geanodiseerd / anodized aluminium
BAL-D 1500 NAS	1500	satijn geanodiseerd / satin anodized
BAL-D 1500 NA	1500	geanodiseerd / anodized aluminium
glasdikte (mm): 12.76-21.52		glass thickness (mm): 12.76-21.52
materiaal: aluminium		material: aluminium
rubbers en kegen zijn niet inbegrepen		gaskets and wedge inserts not included
Exclusieve montage materiaal		Mounting accessories not included
Glasdikte specificereb a.u.b.		Please specify the glass thickness
Bij buiten montage raden wij aan om drainage gaten te boren		When mounting outdoors we recommend punching drainage

BAL-S

Channel Shoe - side installation

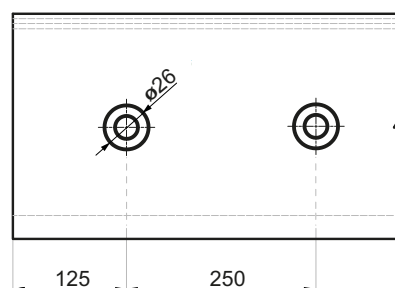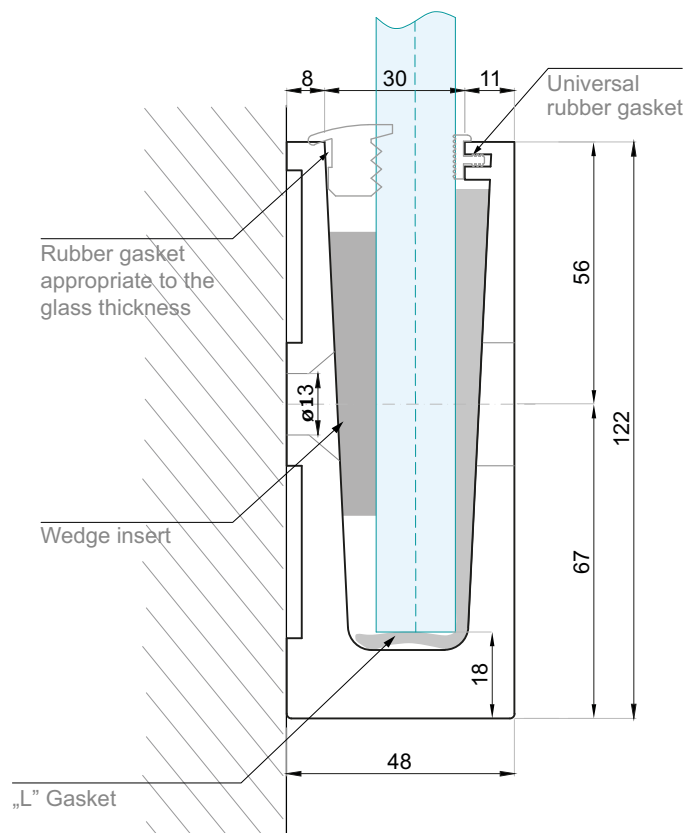


Spacing for the fixing holes
channel shoe 3000 mm & 1500 mm

Code	Lenght (mm)	Finish
BAL-S 3000 NAS	3000	satijn geanodiseerd / satin anodized
BAL-S 3000 NA	3000	geanodiseerd / anodized aluminium
BAL-S 1500 NAS	1500	satijn geanodiseerd / satin anodized
BAL-S 1500 NA	1500	geanodiseerd / anodized aluminium
glasdikte (mm):	12.76-21.52	glass thickness (mm) 12.76-21.52
material: aluminium		material: aluminium
rubbers en kegen zijn niet inbegrepen		gaskets and wedge inserts not included
Exclusieve montage materiaal		Mounting accessories not included
Glasdikte specificeren a.u.b.		Please specify the glass thickness


Bij buiten montage raden wij aan om drainage gaten te boren

When mounting outdoors we recommend punching drainage


Channel Shoe - floor installation with side fixing

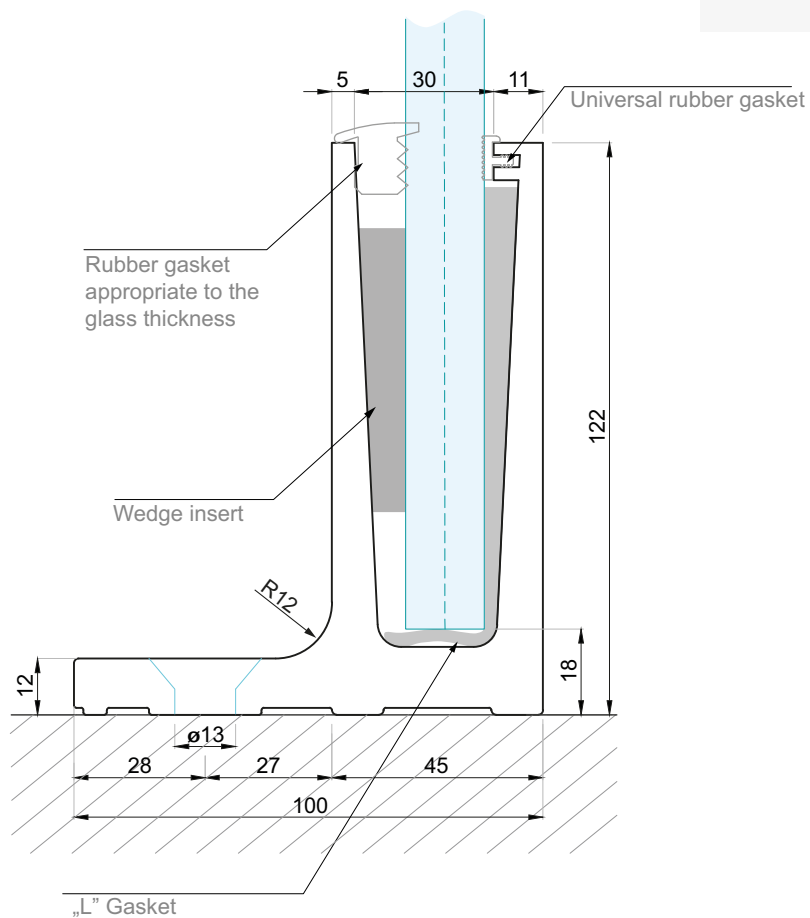

rubber gasket

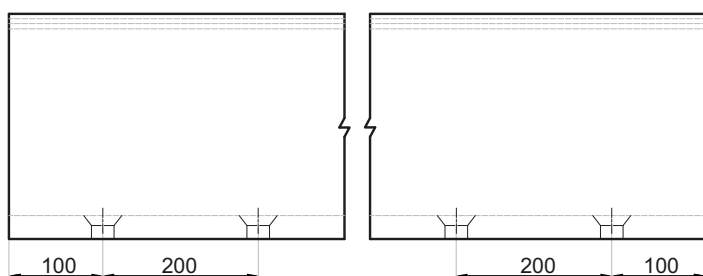

Spacing of the fixing holes - channel shoe 3000 mm


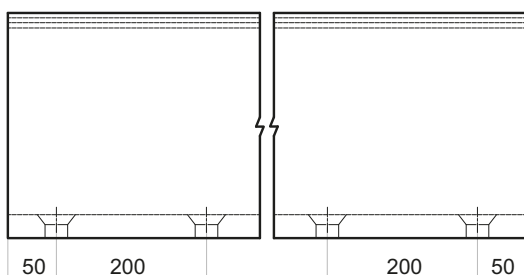


Spacing of the fixing holes - channel shoe 1500 mm

Code	Lenght (mm)	Finish
BAL-F 3000 NAS	3000	satijn geanodiseerd / satin anodized
BAL-F 3000 NA	3000	geanodiseerd / anodized aluminium
BAL-F 1500 NAS	1500	satijn geanodiseerd / satin anodized
BAL-F 1500 NA	1500	geanodiseerd / anodized aluminium
glasdikte (mm): 12.76-21.52		glass thickness (mm): 12.76-21.52
materiaal: aluminium		material: aluminium
rubbers en kegen zijn niet inbegrepen		gaskets and wedge inserts not included
Exclusieve montage materiaal		Mounting accessories not included
Glasdikte specificeren a.u.b.		Please specify the glass thickness
Bij buiten montage raden wij aan om drainage gaten te boren		When mounting outdoors we recommend punching drainage

BAL-D-COR-EXT

Corner connector 90

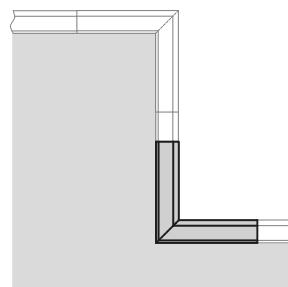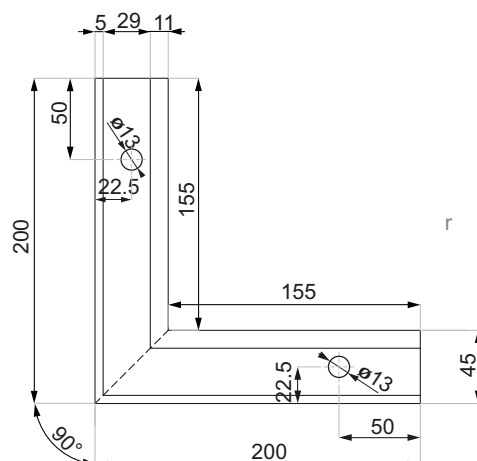

Code

Finish

BAL-D-COR-EXT NAS satijn geanodiseerd / satin anodized

BAL-D-COR-EXT NA geanodiseerd / anodized aluminium

glasdikte (mm): 12.76-21.52 glass thickness (mm): 2.76-21.52

material: aluminium material: aluminium

rubbers en kegen zijn niet inbegrepen gaskets and wedge inserts not included

Exclusieve montage materiaal Mounting accessories not included



Glasdikte specificereb a.u.b. Please specify the glass thickness

Bij buiten montage raden wij aan om drainage gaten te boren

When mounting outdoors we recommend punching drainage

BAL-D-COR-INT

Corner connector 270

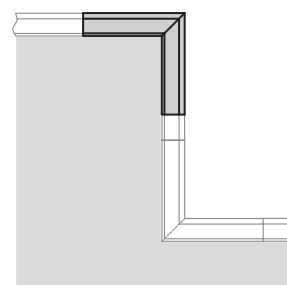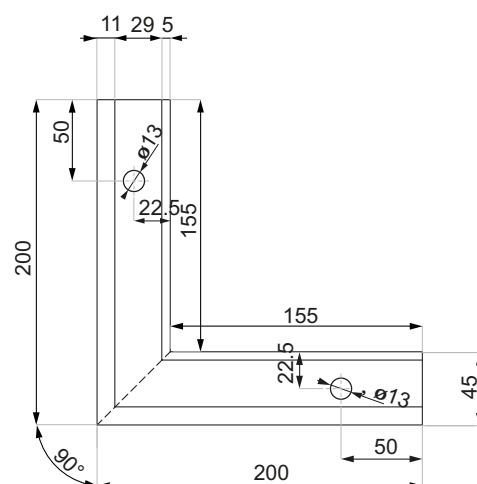

Code

Finish

BAL-D-COR-INT NAS satijn geanodiseerd / satin anodized

BAL-D-COR-INT NA geanodiseerd / anodized aluminium

glasdikte (mm): 12.76-21.52 glass thickness (mm): 2.76-21.52

material: aluminium material: aluminium

rubbers en kegen zijn niet inbegrepen gaskets and wedge inserts not included

Exclusieve montage materiaal Mounting accessories not included

Glasdikte specificereb a.u.b. Please specify the glass thickness

Bij buiten montage raden wij aan om drainage gaten te boren

When mounting outdoors we recommend punching drainage

MONTAGE ONDERDELEN


SET of rubber gaskets and wedge inserts for 1500mm channel shoe




Universal rubber gasket



Rubber gasket appropriate to the glass thickness

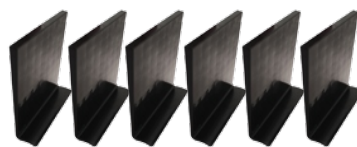

„L” gasket



rubber gasket

Wedge insert appropriate to the glass thickness
(to facilitate the installation the colour indicates the glass thickness)

SET for 1500 mm channel shoe

Product	pcs
„L” gasket	6
Wedge insert	6
Universal gasket	1500 mm
Rubber gasket appropriate to the glass thickness	1500 mm

SET of rubber gaskets and wedge inserts


Code	Glass thickness(mm)	Lenght(mm)
BAL-G13 SET/1500	12,76	1500
BAL-G17 SET/1500	16,76	1500
BAL-G18 SET/1500	17,52	1500
BAL-G21 SET/1500	20,76	1500
BAL-G22 SET/1500	21,52	1500

MONTAGE ONDERDELEN


SET of rubber gaskets and wedge inserts for 3000mm channel shoe



Rubber gasket appropriate to the glass thickness

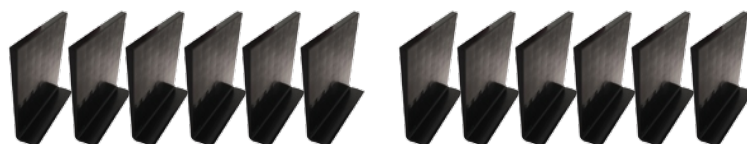

„L” gasket

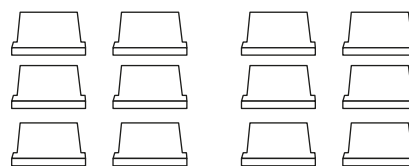

(to facilitate the installation the colour indicates the glass thickness)

SET for 3000 mm channel shoe


Product	pcs
„L” gasket	12
Wedge insert	12
Universal gasket	3000 mm
Rubber gasket appropriate to the glass thickness	3000 mm

SET of rubber gaskets and wedge inserts

Code	Glass thickness(mm)	Lenght(mm)
BAL-G13 SET/1500	12,76	3000
BAL-G17 SET/1500	16,76	3000
BAL-G18 SET/1500	17,52	3000
BAL-G21 SET/1500	20,76	3000
BAL-G22 SET/1500	21,52	3000

ACCESSOIRES

„L” gasket

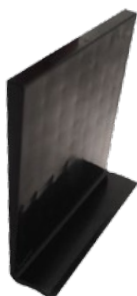

rubber gasket

GASKET „L”

ACCESSOIRES

of the glass the wedge insert would be used



YELLOW

RED

GREEN

BLUE

BROWN

for glass 12,76 mm

for glass 16,76 mm

for glass 17,52 mm

for glass 20,76 mm

for glass 21,52 mm

ACCESOIRESS

Rubber gaskets



Universal rubber gasket




Rubber gasket appropriate to the glass thickness

RUBBER GASKETS

BAL-D-EC


End cap for channel shoe BAL-D

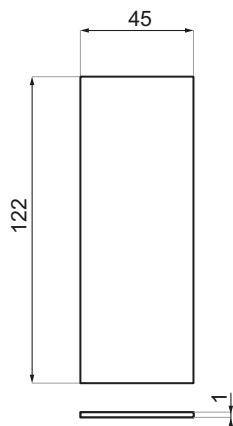

Code	Materiaal	Finish
BAL-D-EC SSS	rvs / stainless steel	satijn / satin
BAL-D-EC RAL	rvs / stainless steel	RAL 9006/ RAL 9006

BAL-S-EC


End cap for channel shoe BAL-S

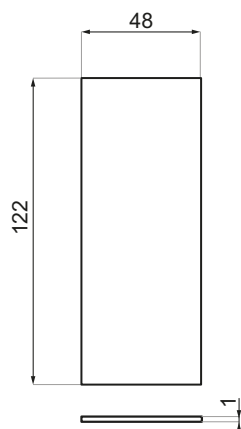

Code	Materiaal	Finish
BAL-S-EC SSS	rvs / stainless steel	satijn / satin
BAL-S-EC RAL	rvs / stainless steel	RAL 9006/ RAL 9006

BAL-F-EC L (R)

End cap for channel shoe BAL-F

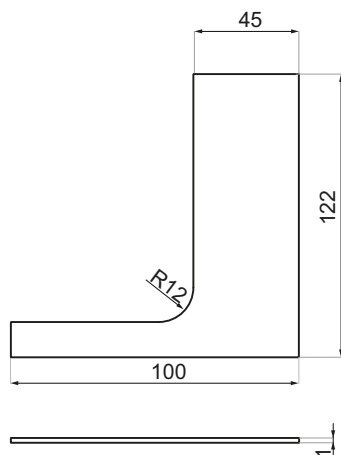

right




left

Code	Materiaal	Finish
BAL-F-EC-L SSS	rvs / stainless steel	satijn / satin
BAL-F-EC-R SSS	rvs / stainless steel	satijn / satin
BAL-F-EC-L RAL	rvs / stainless steel	RAL 9006/ RAL 9006
BAL-F-EC-R RAL	rvs / stainless steel	RAL 9006/ RAL 9006

P-UNR

Round handrail

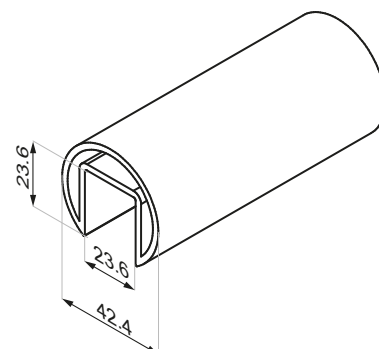

Round handrail P-UNR

Code	Glass thickness (mm)	Finish
P-UNR11.5-13.5SSS	11.5-13.5	satijn / satin
P-UNR16-17.5SSS	16-17.5	satijn / satin
P-UNR20-21.5SSS	20-21.5	satijn / satin


materiaal: rvs 304

material: stainless steel SUS 304

For more accessories please contact sales department

P-UNP

Square handrail

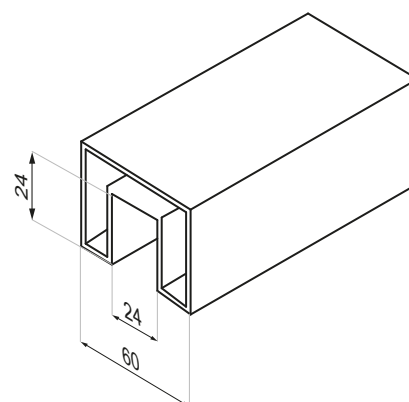

Square handrail P-UNP

Code	Glass thickness (mm)	Finish
P-UNR11.5-13.5SSS	11.5-13.5	satijn / satin
P-UNR16-17.5SSS	16-17.5	satijn / satin
P-UNR20-21.5SSS	20-21.5	satijn / satin

material: stainless steel SUS 304

For more accessories please contact sales department